

Climacondens® flat



Datasheet

- Power range up to 20 kW
- High flow rate up to 20l / h
- Low running noise 22 dBA
- Easy and quick maintenance



Technical Data	
Max. Delivery rate	20 l/ h
Max. Suction height	3 m
Max. Delivery height	10 m (Delivery rate 4 l/h)
Max. Pressure	14m (Delivery rate 0 l/h)
Noise level at 1m according to EN ISO 3744	≤ 22dBA
Noise level at 1m	≤ 25 dBA
Power supply	230V~ 50/60 Hz- 14 W
Insulation class	double insulated
Switching points	In: 16 mm; Out: 11 mm; Alarm: 19 mm
Security contact	NC 8 A ohmic load - 250 V
Overheat protection (switch-off point)	115°C (Auto Reset)
Max. Condensate temperature	35 °C
Operating mode	65% Switch-on time
Protection class	IPX2

Conveying capacity

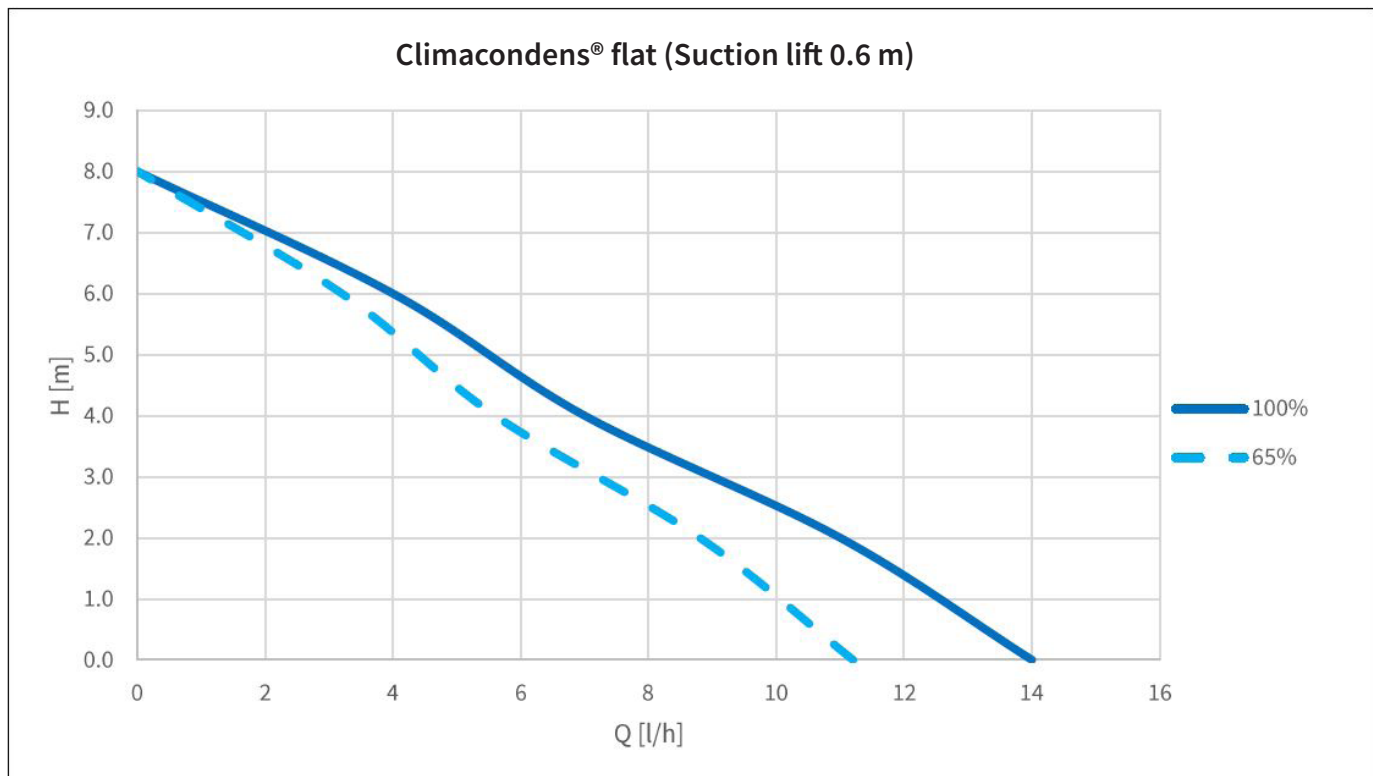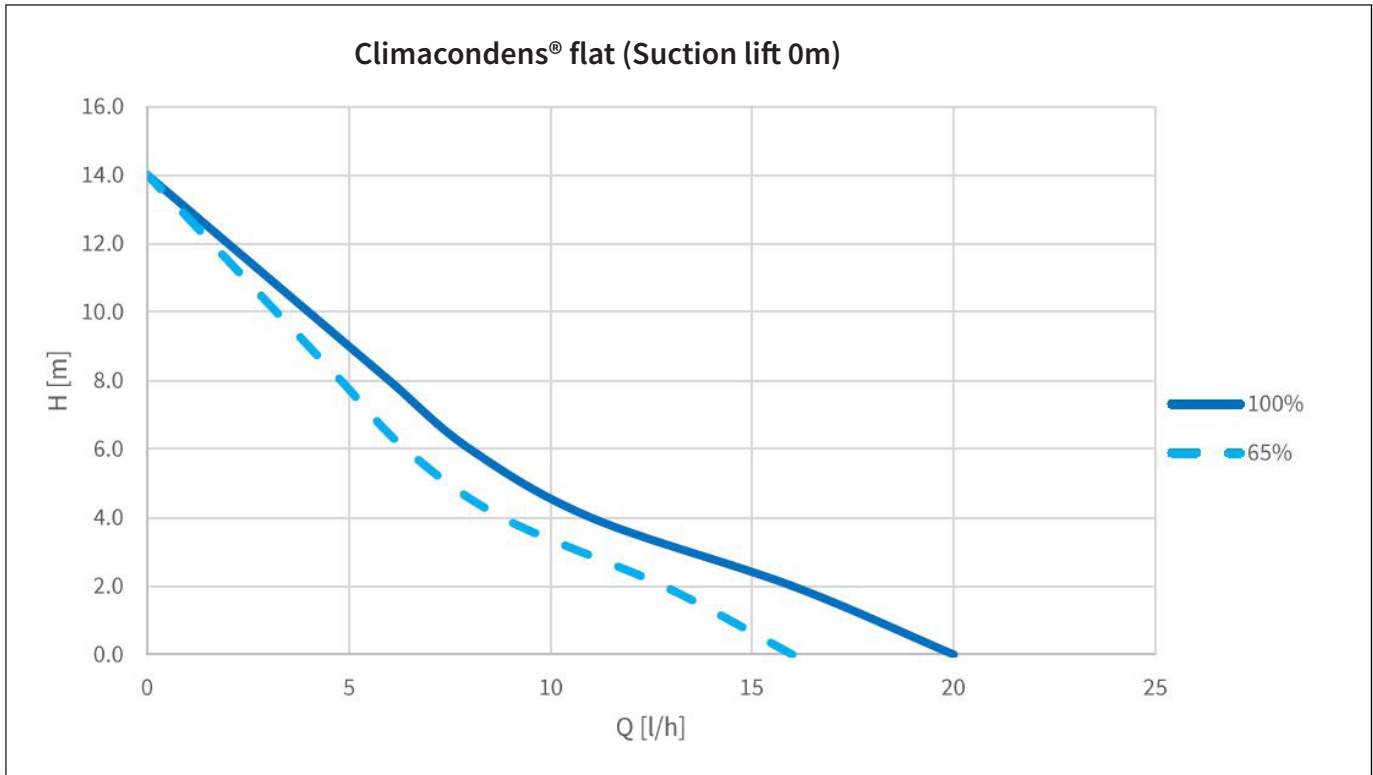

Dimensions

